

AVN726EA Firmware Update Process

Step 1:

Download and unzip the AVN726EA Firmware Upgrade file from Support → Updates → Software Updates

Step 2:

Insert a blank CD-R into your PC and burn the MN20076.vbk file to the CD-R
Note: Will not work with DVD-R.

Step 3:

Start the Firmware Update Process by following the screenshots below:

3.1 Insert the update disk into the AVN726EA unit.



3.2 Push the "MENU" control (hardware switch). The Audio screen will display.



3.3 Push the "AUDIO OFF" button to place unit into the "AUDIO OFF" mode.



3.4 Push the "AV" control (hardware switch).



3.5 On the screen that displays, the four corners of the screen (A, B, C, and D) should be pushed sequentially A → B → A → C → A → D.

Note: A,B,C,D are not displayed on the screen. These are indicated as areas to press to activate the software update screen.



3.6 When you see "Start up update?" displayed, push "Yes."




3.7 The unit will now start to read the data and begin the update version.

Please allow the process to complete before continuing.



3.8 When all the data is read, the display will show an update selection screen.

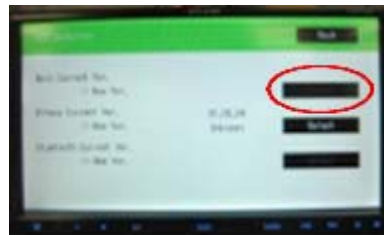


3.9 Press "OK" and wait for the update process to complete.



3. 10 Once the update process is complete, press "OK" again.



3. 11 Press "END".

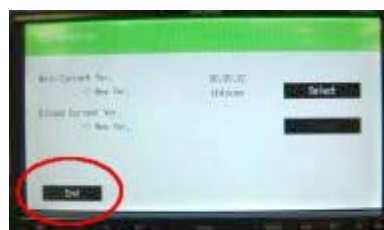

3.12 Turn the vehicle's ACC off.

3.13 Wait approximately 10 seconds, then turn the vehicle's ACC on.

3.14 Push EJECT and remove the disk. The update process is now completed.